

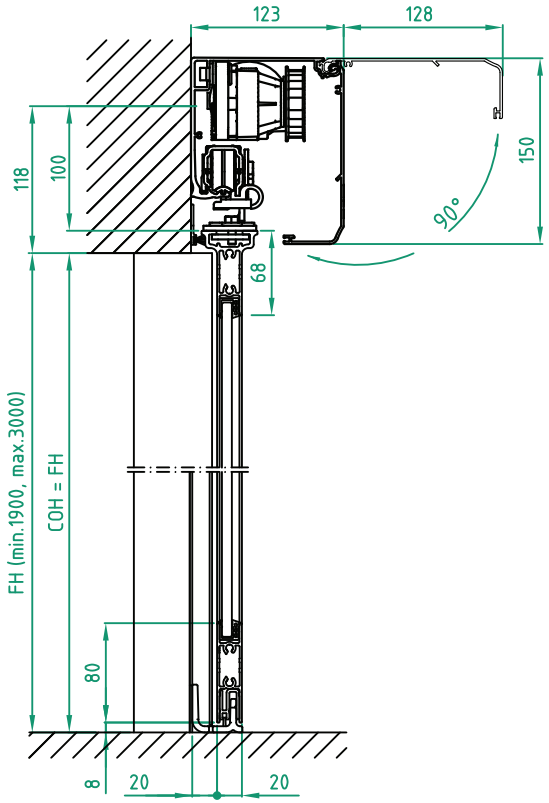


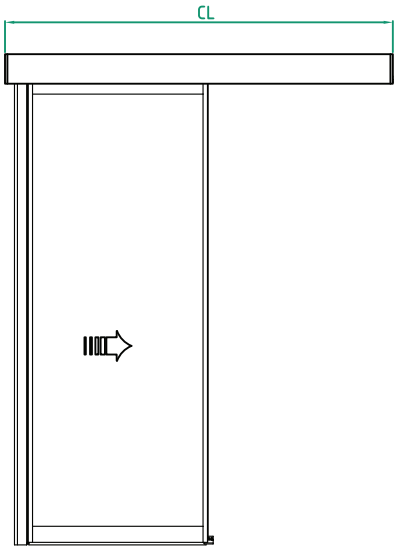

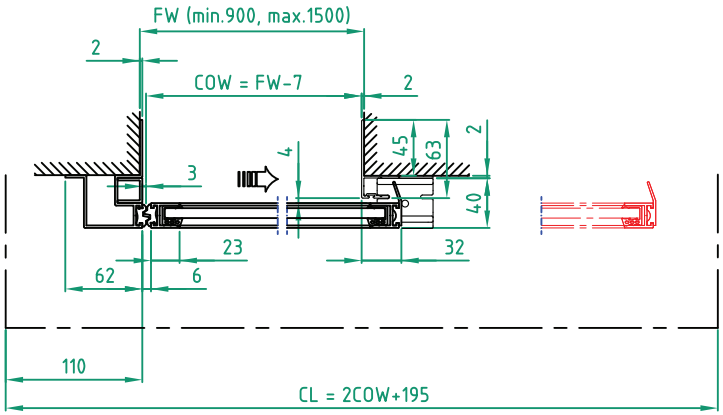

STATE WHEN ORDERING

FW = 1400 mm
FH = 2100 mm
COW = 1393 mm
COH = 2100 mm
CL = 3000 mm

Surface treatment
- [x] Silver anodized
- Special anodized .....
- RAL .....
- Special powder coating .....
- .....

Options see layers:
- [x] Alternative F (concrete/brick)
- [ ] Alternative U (aluminium/steel)
- [ ] TightSeal (floor level difference max. ± 3 mm)

Glass option see drw. 1009030
Glass code:
GL8

Installation
- [ ] Floor heating
- [ ] Other .....

©ASSA ABLOY Entrance Systems AB, 2017
Technical data subject to change without notice.

Customer: Craft Expo AB	Ref:	Automatic door system ASSA ABLOY Slim 1 Panel wall mounted opening right Art. No. 1009387-1PS-15 ASSA ABLOY SL500
Door id: Skjutdörr	Date:	
Project No:	Sign:	

ASSA ABLOY

6.0 | 1009387-EI